

Accessory: Radome, used with SP2 parabolic reflector antenna

RD2

SPECIFICATIONS

General

Item	Accessory: Radome
Used With	SP2 parabolic reflector antenna

*Additional OEM interfaces and adapters may be available. Contact RadioWaves for a complete and current list of available adapters.

Electrical

Attenuation, 2 Ghz	0.2 dB
Attenuation, 5 Ghz	0.4 dB
Attenuation, 7 GHz	0.5 dB
Attenuation, 10 GHz	0.6 dB
Attenuation, 13 GHz	0.7 dB

Add to Antenna VSWR, Max, 2 GHz	0.02
Add to Antenna VSWR, Max, 5 GHz	0.02
Add to Antenna VSWR, Max, 7 GHz	0.02
Add to Antenna VSWR, Max, 10 GHz	0.03
Add to Antenna VSWR, Max, 13 GHz	0.04

Mechanical

Net Weight	7 lbs 3.2 kg
Mechanical Configuration	RD

Operating Temperature Range	-40 to +60 C
-----------------------------	--------------

Regulatory Compliance




RoHS-compliant	Yes
----------------	-----

Shipping Information

Package Type	Cardboard
Gross Weight	8 lbs 3.6 kg

Dimensions, L x W x H	28 x 8 x 28in 71 x 20 x 71 cm
Shipping Volume	3.6 cu ft 0.1 cu m

TECHNICAL DRAWINGS

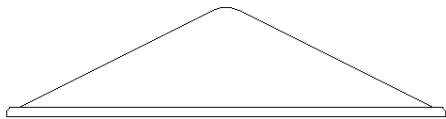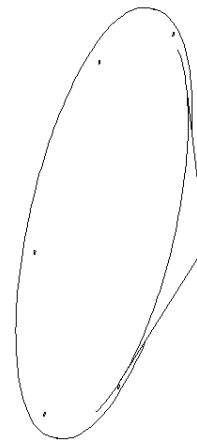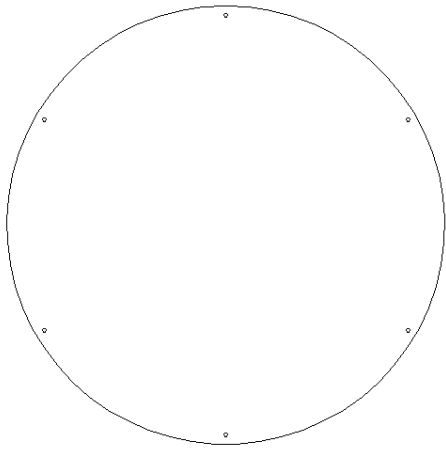

OL-RD