

Accessory: Radome, used with SP4 parabolic reflector antenna

RD4

SPECIFICATIONS

General

Item	Accessory: Radome
Used With	SP4 parabolic reflector antenna

*Additional OEM interfaces and adapters may be available. Contact RadioWaves for a complete and current list of available adapters.

Electrical

Attenuation, 2 GHz	0.2 dB	Add to Antenna VSWR, Max, 2 GHz	0.02
Attenuation, 5 GHz	0.4 dB	Add to Antenna VSWR, Max, 5 GHz	0.02
Attenuation, 7 GHz	0.5 dB	Add to Antenna VSWR, Max, 7 GHz	0.02
Attenuation, 10 GHz	0.6 dB	Add to Antenna VSWR, Max, 10 GHz	0.03
Attenuation, 13 GHz	0.7 dB	Add to Antenna VSWR, Max, 13 GHz	0.04

Mechanical

Net Weight	45 lbs 29.4 kg	Operating Temperature Range	-40 to +60 C
Mechanical Configuration	RD		




Regulatory Compliance

RoHS-compliant	Yes
----------------	-----

Shipping Information

Package Type	Wood Crate	Dimensions, L x W x H	52 x 18 x 53in 132 x 45 x 135 cm
Gross Weight	51 lbs 25.1 kg	Shipping Volume	28.7 cu ft 0.8 cu m

TECHNICAL DRAWINGS

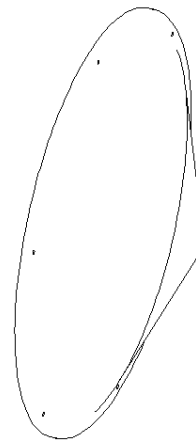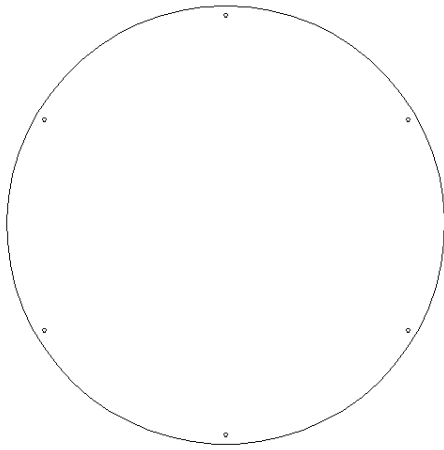

OL-RD