

Accessory: Radome, used with SP6 parabolic reflector antenna

RD6

SPECIFICATIONS

General

Item	Accessory: Radome
Used With	SP6 parabolic reflector antenna

*Additional OEM interfaces and adapters may be available. Contact RadioWaves for a complete and current list of available adapters.

Electrical

Attenuation, 2 Ghz	0.2 dB
Attenuation, 5 Ghz	0.4 dB
Attenuation, 7 GHz	0.5 dB
Attenuation, 10 GHz	0.6 dB
Attenuation, 13 GHz	0.7 dB

Add to Antenna VSWR, Max, 2 GHz	0.02
Add to Antenna VSWR, Max, 5 GHz	0.02
Add to Antenna VSWR, Max, 7 GHz	0.02
Add to Antenna VSWR, Max, 10 GHz	0.03
Add to Antenna VSWR, Max, 13 GHz	0.04

Mechanical

Net Weight	95 lbs 42.8 kg
Mechanical Configuration	RD

Operating Temperature Range	-40 to +60 C
-----------------------------	--------------

Regulatory Compliance




RoHS-compliant	Yes
----------------	-----

Shipping Information

Package Type	Wood Crate
Gross Weight	142 lbs 64.4 kg

Dimensions, L x W x H	77 x 20 x 80in 195 x 51 x 203 cm
Shipping Volume	71.3 cu ft 2.02 cu m

TECHNICAL DRAWINGS

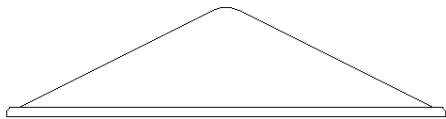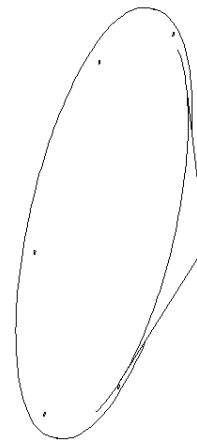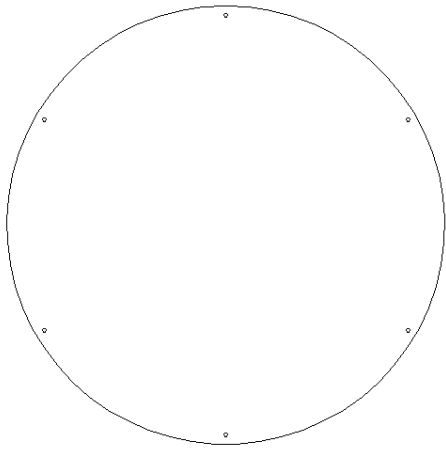

OL-RD