

0.3 m | 1 ft High Performance Parabolic Reflector  
Antenna, Dual-polarized, 37-40GHz

**HPLPD1-38**



The HP High Performance Series by RadioWaves offers a full line of high performance parabolic antennas engineered to provide ETSI class 2/3 radiation pattern performance as well as excellent gain. RadioWaves field-proven pre-assembled antennas and robust pole-mounts ensure “set and forget” installation with minimal post-installation maintenance. The included radome ensures robust and reliable performance under the most challenging conditions. If it’s rugged, it must be RadioWaves!

#### FEATURES AND BENEFITS

- High Performance ETSI Class 2/3\* Parabolic Antennas – Excellent performance for a wide range of applications
- Fully Preassembled at the Factory – Simplifies installation on site and guarantees “factory-tested” quality

\*ETSI Class depends on frequency band

#### SPECIFICATIONS

##### General

Antenna Type	High Performance Parabolic Reflector Antenna
Size, nominal	1 ft   0.3 m
Polarization	Dual

Standard RF Connector Type	WR28
Standard RF Connector Suffix	RS (append suffix to model number)

##### Electrical

Operating Frequency Band	37 - 40 GHz
Half Power Beamwidth, Horizontal	1.7 degrees
Half Power Beamwidth, Vertical	1.7 degrees
Cross-Polarization Discrimination	30 dB
Front to Back Ratio (F/B)	60 dB

Gain, Low Frequency	38.8 dBi
Gain, Mid Frequency	39.1 dBi
Gain, High Frequency	39.5 dBi
VSWR	1.37:1
Return Loss	-16.1 dB

## Mechanical

Fine Azimuth Adjustment	+/- 10 degrees
Fine Elevation Adjustment	+/- 30 degrees
Mounting Pipe Diameter, Min	2 inch   5.08 cm
Mounting Pipe Diameter, Max	4.5 inch   11.4 cm
Net Weight	17 lbs   7.7 kg
Wind Velocity Operational	90 mph   145 km/h
Wind Velocity Survival Rating	125 mph   201 km/h

Mechanical Configuration	HPLP1
Axial Force (FA)	46 lbs   204 N
Side Force (FS)	13 lbs   28 N
Twisting Moment (MT)	27 ft-lbs   36 Nm
Operating Temperature Range	-40 to +60 C
Max Pressure, PSIG, (if waveguide interface)	5

## Regulatory Compliance

FCC	Part 101 Cat. A
Industry Canada Compliance	undeclared

ETSI	302217 R5 C3
RoHS-compliant	Yes


## Shipping Information

Package Type	Cardboard
Gross Weight	24 lbs   10.8 kg

Dimensions, L x W x H	18 x 18 x 19in   46 x 46 x 48 cm
Shipping Volume	3.56 cu ft   0.1 cu m

\*Additional OEM interfaces and adapters may be available. Contact RadioWaves for a complete and current list of available adapters.

TECHNICAL DRAWINGS

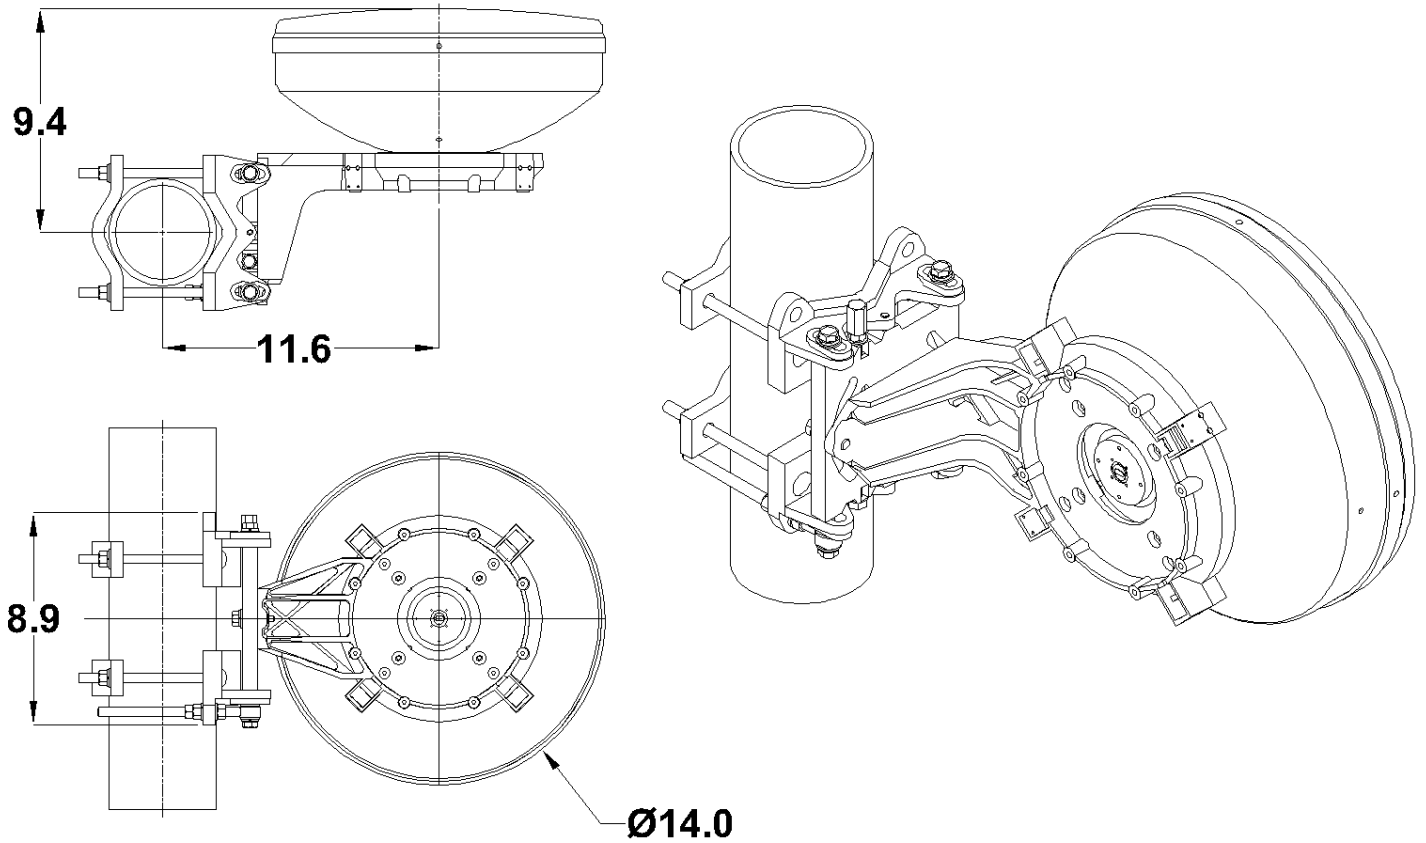

**HPLP1**