

Accessory: Radome, used with SP6 parabolic reflector antenna

**RD6**

**SPECIFICATIONS**

**General**

Item	Accessory: Radome
Used With	SP6 parabolic reflector antenna

\*Additional OEM interfaces and adapters may be available. Contact RadioWaves for a complete and current list of available adapters.

**Electrical**

Attenuation, 2 Ghz	0.2 dB
Attenuation, 5 Ghz	0.4 dB
Attenuation, 7 GHz	0.5 dB
Attenuation, 10 GHz	0.6 dB
Attenuation, 13 GHz	0.7 dB

Add to Antenna VSWR, Max, 2 GHz	0.02
Add to Antenna VSWR, Max, 5 GHz	0.02
Add to Antenna VSWR, Max, 7 GHz	0.02
Add to Antenna VSWR, Max, 10 GHz	0.03
Add to Antenna VSWR, Max, 13 GHz	0.04

**Mechanical**

Net Weight	95 lbs   42.8 kg
Mechanical Configuration	RD

Operating Temperature Range	-40 to +60 C
-----------------------------	--------------

**Regulatory Compliance**




RoHS-compliant	Yes
----------------	-----

**Shipping Information**

Package Type	Wood Crate
Gross Weight	142 lbs   64.4 kg

Dimensions, L x W x H	77 x 20 x 80in   195 x 51 x 203 cm
Shipping Volume	71.3 cu ft   2.02 cu m

TECHNICAL DRAWINGS

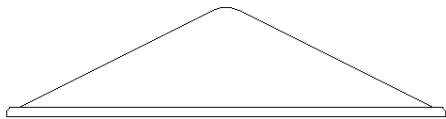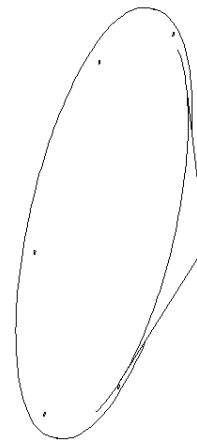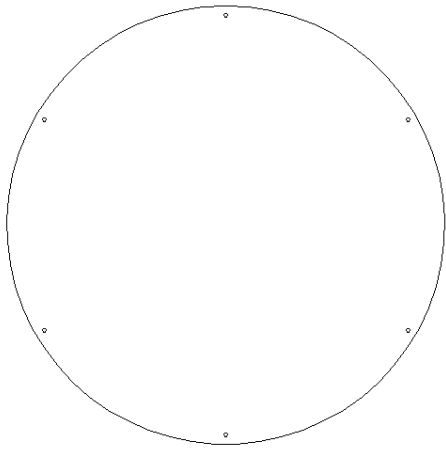

**OL-RD**