


0.6 m | 2 ft Standard Performance Parabolic Reflector Antenna, Dual-polarized, 2.2-2.5GHz

SPD2-2.3

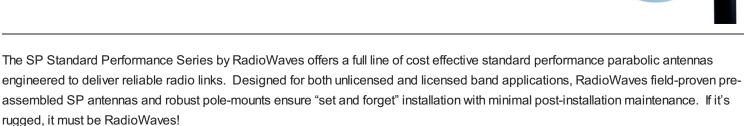

FEATURES AND BENEFITS

- Standard Performance Parabolic Antennas Excellent performance for a wide range of licensed and unlicensed applications
- Fully Preassembled at the Factory Simplifies installation on site and guarantees "factory-tested" quality

SPECIFICATIONS

General

Antenna Type	Standard Performance Parabolic Reflector Antenna
Size, nominal	2 ft 0.6 m
Polarization	Dual

Electrical

Operating Frequency Band	2.2 - 2.5 GHz
Half Power Beamwidth, Horizontal	14 degrees
Half Power Beamwidth, Vertical	14 degrees
Cross-Polarization Discrimination	28 dB
Front to Back Ratio (F/B)	28 dB

Standard RF Connector Type	N-Female
Standard RF Connector Suffix	NS (append suffix to model number)

radiowaves

Gain, Low Frequency	20.2 dBi
Gain, Mid Frequency	20.8 dBi
Gain, High Frequency	21.3 dBi
VSWR	1.5:1
Return Loss	-14 dB



Mechanical

Fine Azimuth Adjustment	+/- 10 degrees	
Fine Elevation Adjustment	+/- 30 degrees	
Mounting Pipe Diameter, Min	2 inch 5.08 cm	
Mounting Pipe Diameter, Max	4.5 inch 11.4 cm	
Net Weight	22 lbs 9.9 kg	26 lbs 11.7 Kg with RD radome
Wind Velocity Operational	90 mph 145 km/h	

Wind Velocity Survival Rating	125 mph 201 km/h	
Mechanical Configuration	SP2	
Axial Force (FA)	222 lbs 988 N	122 lbs 543 Nm with RD radome
Side Force (FS)	14 lbs 62 N	24 lbs 107 Nm with RD radome
Twisting Moment (MT)	225 ft-lbs 305 Nm	194 lbs 263 Nm with RD radome
Operating Temperature Range	-40 to +60C	

Regulatory Compliance

Industry Canada Compliance	undeclared
RoHS-compliant	Yes

Shipping Information

Package Type	Cardboard	Dimensions, L x W x H	28 x 8 x 28in 71 x 20 x 71 cm
Gross Weight	25 lbs 11.3 kg	Shipping Volume	3.6 cu ft 0.1 cu m

Contact RadioWaves Sales for alternate RF interface options.



TECHNICAL DRAWINGS

